

# Installation Specification


## Recessed Mount Using Mounting Brackets

### Front View


Opening width plus "Side Track" clearances, Minimum 2 1/4" per "Side Track".  
Maximum total width, 25" depending on screen fabric.

- Screen Infill available in a variety of fabrics:**
- Insect Protection
  - Sun Control
  - Privacy
  - Black-out


### Side Track Detail

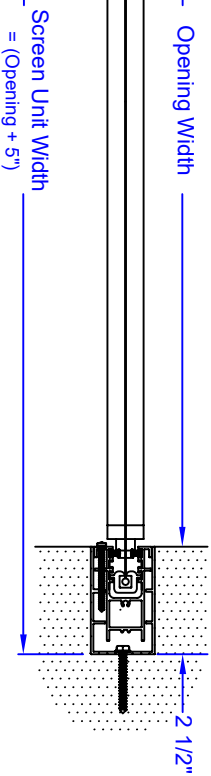

### Side View

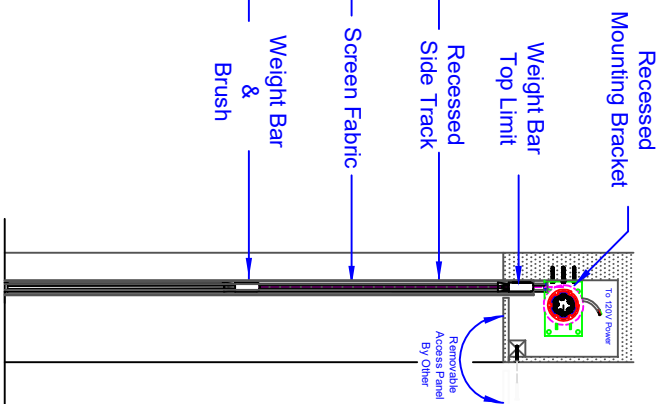

### Pocket & Weight Bar Detail

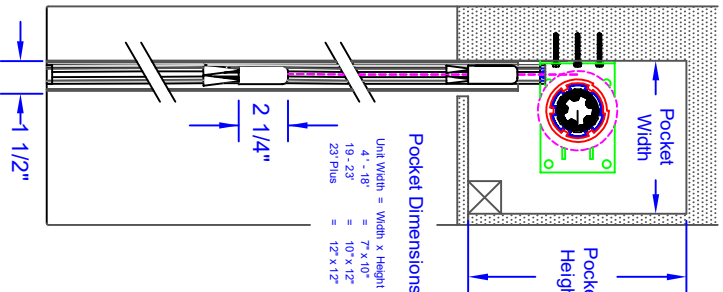

### Motor

- \* 120V AC 60Hz "Somfy" Motor
- \* Index Protection Rating: IP 44
- \* Rated Current 1.3A to 2.1A
- \* c/w Object detection or clutch
- Operators**
- \* Single channel hand-held remote control.
- \* Multi-channel hand-held remote control.
- \* Somfy "myLink" app for smart-phone.
- \* Compatible for home automation systems



Product Line	Manufacturer	Model	Article No./Reference
Universal Screens	Universal Screens	Universal Screens	Universal Screens
Approved By	Checked By	Approved By - date	Date of issue
PS	PS	PS - 07/01/2013	07/01/2013
Scale	Scale	Scale	Scale
1:1	1:1	1:1	1:1
Universal Screens	Universal Screens	Universal Screens	Universal Screens
N/A	N/A	N/A	N/A